


Gipro Mount

Fully adjustable handlebar mount
for Gipro gear indicators

Install guide


1 Choose the proper shim

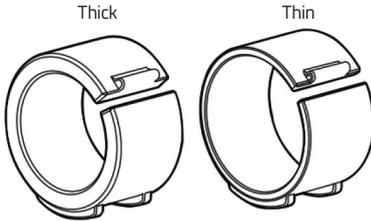

Disassemble the clamp. Separate the plastic shims and unroll the thin shim. Depending on the target tube diameter, select the corresponding shim and place on the handlebar.


21-23mm (7/8")	:	Thick Shim
24-26mm (1")	:	Thin Shim
27-29mm (9/8")	:	Without Shim

2 Place the clamp on the bar




Wind the arm around the handlebar then close. If a plastic shim is used, rotate it to the correct position.

3 Insert the pin

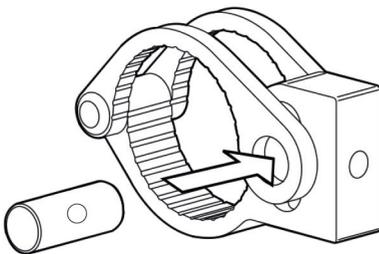


Slide the pin into place, making sure the threaded hole is aligned with the bolt hole.

4 Fasten the clamp

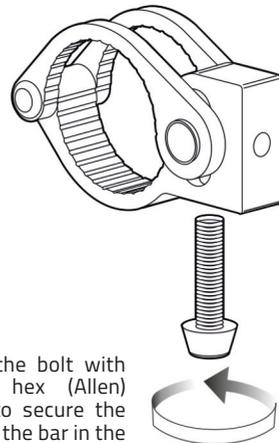


Tighten the bolt with an M5 hex (Allen) wrench to secure the clamp on the bar in the desired position.

5 Mount the housing

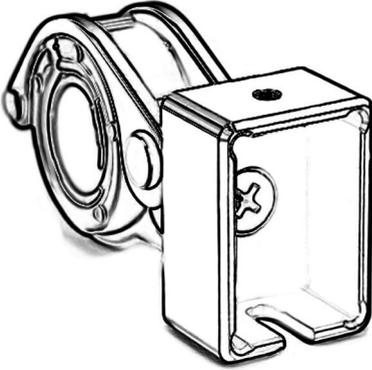


Place the housing in the desired orientation and fasten the bolt. Try the display in the housing and adjust the mount position if necessary.

6 Leave the green foil on

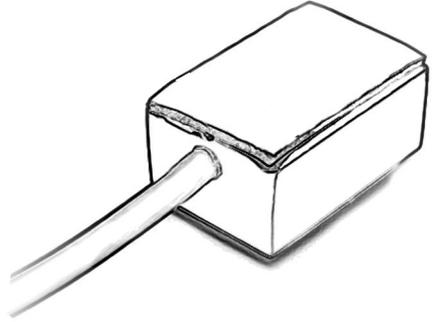

Make sure to leave the green plastic foil intact at the back of the display. If you remove the foil and expose the adhesive backing, you will not be able to remove the display from the mount later.

7 Place the unit in the mount

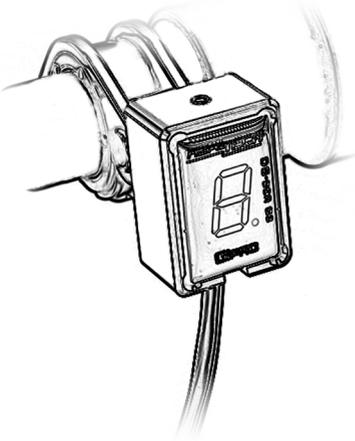

Place the Gipro into the housing then secure the unit in its place with the small Allen bolt at the top of the mount. Use the size 2 Allen key (supplied) to tighten the bolt gently. Do NOT overtighten as it may damage the Gipro.



Smart Tech for your **Ride!**